

## Lattice Candidates for the ILSF Storage Ring

H.GHASEM<sup>1,3</sup>, D. EINFELD<sup>2</sup>, F. SAEIDI<sup>3</sup> and E. AHMADI<sup>3</sup>

<sup>1</sup>School of Particles and Accelerators, IPM, P.O. Box 11395-5531, Tehran, Iran


<sup>2</sup>CELLS-ALBA Synchrotron, Cerdanyola del Vallès

<sup>3</sup>Iranian Light Source Facility, IPM, P.O. Box 19395-5746, Tehran, Iran

### ABSTRACT



Iranian Light Source Facility (ILSF) is a new 3 GeV third generation synchrotron light source which is currently in design and will be built in Iran. It will provide a high photon flux density to cover requirements of experimental science in several fields. Regarding to the proposed budget and in order to produce high quality X-ray pulses with several photon beamlines as a request of users, it has been decided to design a very low emittance ( $\epsilon < 5 \text{ nm-rad}$ ) storage ring with a typical beam intensity of 400 mA and circumference in the range of 280 m to 320 m.

### INTRODUCTION

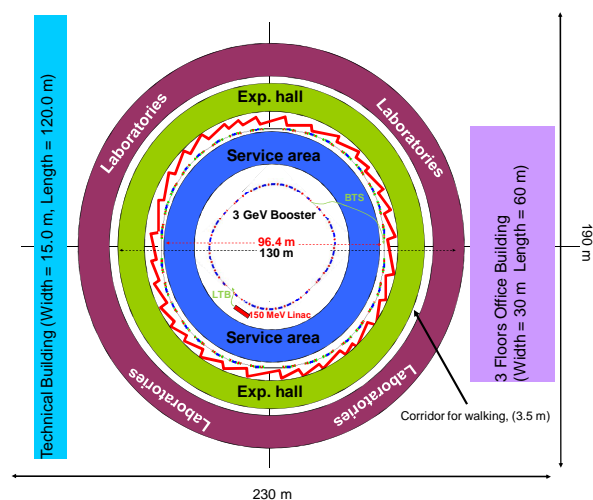

### LATTICE CHOICES


#### ○1<sup>st</sup> candidate

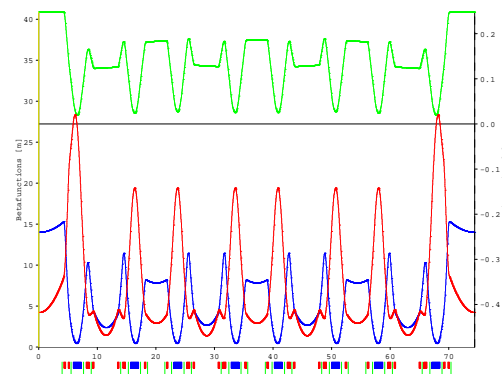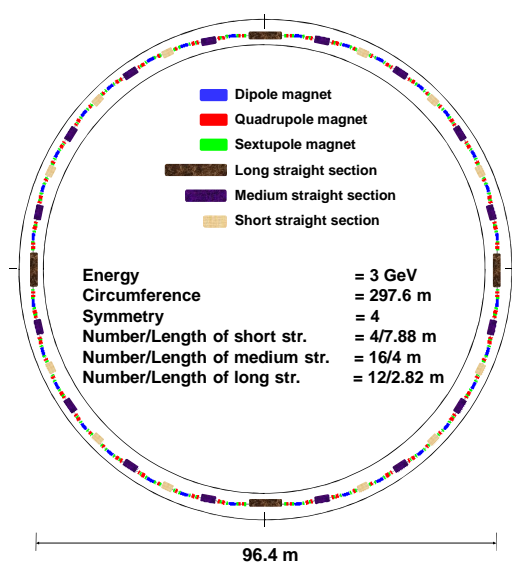

Parameter	Value
Energy (GeV)	3
Circumference (m)	297.6
No. of super-period	4
Current (mA)	400
Emittance (nm-rad)	3.278
Harmonic number	496
RF frequency (MHz)	500
Tune [ $Q_x/Q_y$ ]	18.265/11.328
Nat. energy spread	1.0108E-3
Nat. Chromaticity [ $\xi_x/\xi_y$ ]	-34.56/-28.02
Momentum compaction	7.621E-4
Radiation loss per turn (MeV)	1.0167

### LATTICE CHOICES

#### ○2<sup>nd</sup> candidate

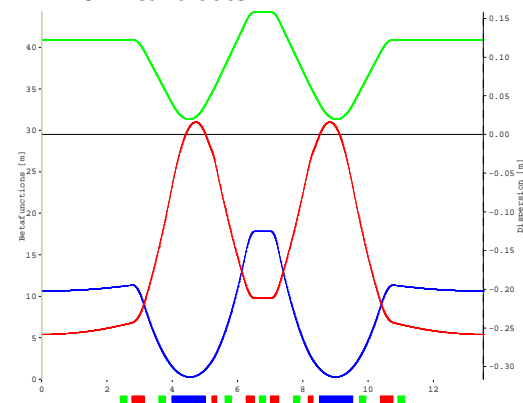

Parameter	Value
Energy (GeV)	3
Circumference (m)	297.6
No. of super-period	22
Current (mA)	400
Emittance (nm-rad)	1.96
Harmonic number	496
RF frequency (MHz)	500
Tune [ $Q_x/Q_y$ ]	21.170/5.134
Nat. energy spread	1.0125E-3
Nat. Chromaticity [ $\xi_x/\xi_y$ ]	-56.17/-35.37
Momentum compaction	5.5156E-4
Radiation loss per turn (MeV)	1.002